

## GEA Bock Compressors HG44e and HG56e

Semi-hermetic GEA Bock Compressors

engineering for a better world

## Bock compressors HG44e and HG56e

*Our solutions are customer-oriented and user-friendly, because they are low-priced, energy-efficient, long-lasting and tailored to your individual needs.*

With its GEA Bock HG44e and HG56e compressor ranges, GEA Refrigeration Technologies introduces new, more efficient semi-hermetic compressors to the market – models that replace its HG4 and HG5 ranges. In addition to their uses in the field of refrigeration and air-conditioning, the new compressors are ideally suited for refrigeration in supermarkets. They offer improved efficiency over their predecessors, greater displacement stages, more compact structural design, and a new configuration of connections. These connections match the gas connections normally found in the sector, to ensure that no adaptation work is necessary when the user invests in a replacement compressor. The foot mountings of the new compressor likewise conform to sector standards. In the four-cylinder HG44e range, four model sizes cover the area of maximum displacement from 41.3 m<sup>3</sup>/h to 67.0 m<sup>3</sup>/h. Three six-cylinder HG56e models round the spectrum off toward the top with displacements of 73.8 m<sup>3</sup>/h to 100.4 m<sup>3</sup>/h.

### Special features

Both new ranges profit from a new and advanced valve plate system, electrical motors from the latest generation, and enhanced gas flow – which increase efficiency and lower energy consumption. In comparison to its predecessors, the GEA Bock HG44e range includes four instead of three model sizes. In addition, the largest version, the HG44e/770-4 compressor, offers with its 67 m<sup>3</sup>/h, almost 20 % more displacement than the largest HG4 model. As a result, this compressor range demonstrates the greatest power density in the sector. With the GEA Bock HG56e range, six-cylinder models are available throughout, instead of the four-cylinder HG5 versions. In comparison to the four-cylinder compressor models usually found on the market, the increase of the number of cylinders leads to enhanced efficiency and optimized running smoothness. Here as well, the largest compressor – with 100.4 m<sup>3</sup>/h displacement – exceeds that of its predecessor by around one-fifth. The GEA Bock oil-pump design, proven over many years, further assures reliable lubrication of all moving parts. The new models furthermore demonstrate excellent service friendliness – for example, simple exchange of the drive motor, as before. With its new GEA Bock HG44e and HG56e compressors, GEA Refrigeration Technologies sets new standards in efficiency and performance.



### Disclaimer

This brochure has been produced for you with the greatest of care. Nevertheless it is not possible to rule out mistakes completely. In such cases we cannot assume any liability. The contents correspond to the status on going to print. Deviations cannot be ruled out because of the ongoing development process for our products.

The details are provided as unbinding general information and cannot substitute detailed, individual consultation. Reprints even only of excerpts only allowed with the explicit approval of GEA Bock GmbH. © GEA Bock GmbH 2014


### The current program

...8 model sizes with 26 capacity stages from 5,4 to 281,3 m<sup>3</sup>/h (50 Hz)



### Type key

**HGX56e / 1155 - 4S**

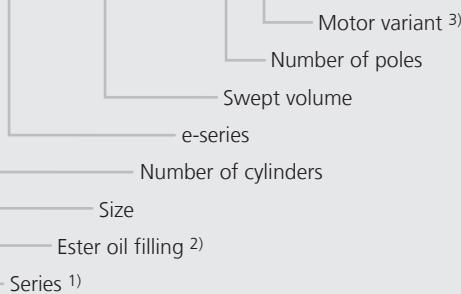


<sup>1)</sup> HG = Hermetic Gas-Cooled (suction gas-cooled)

<sup>2)</sup> X = Ester oil filling


(HFC refrigerants e.g. R134a, R404A, R507, R407C)

<sup>3)</sup> S = More powerful motor e.g. air-conditioning applications

## Comparison HG44e vs. HG4

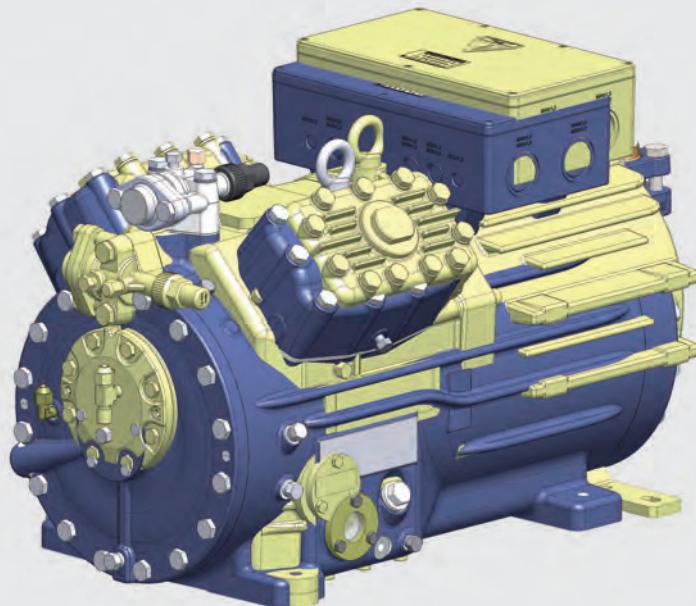


Blue: Bock HG44e  
Yellow: Bock HG4

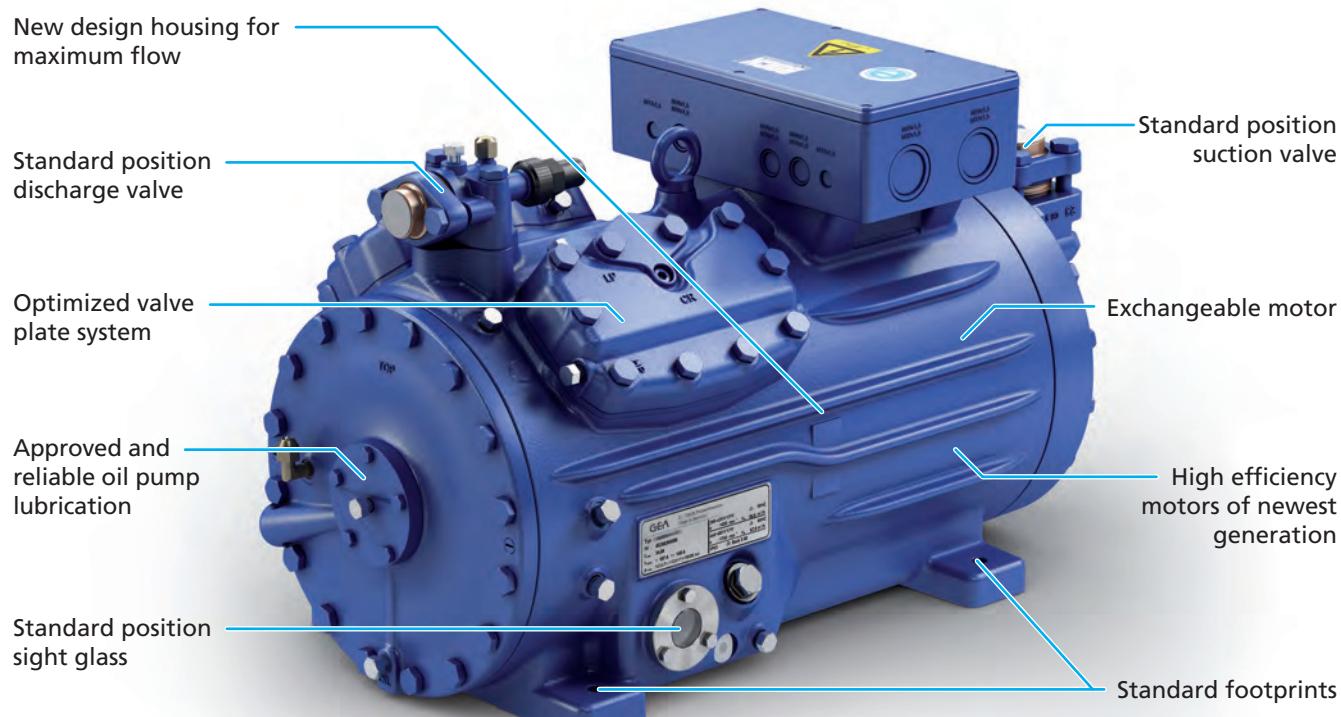


Length (cm)	Width (cm)	Height (cm)
-3	-1	-2

Comparison HGX44e/475-4 vs. competitor



Refrigerant R134a

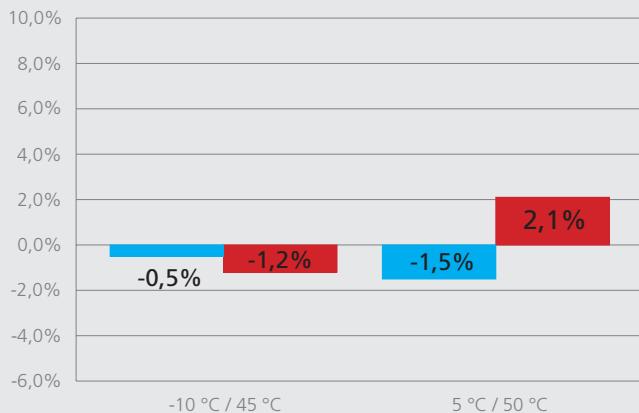

Comparison HGX44e/770-4 S vs. competitor

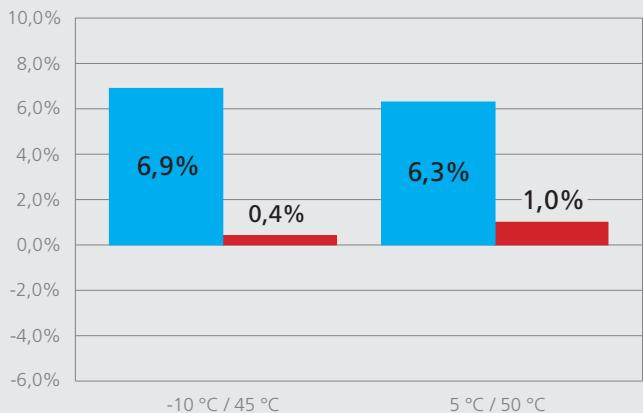


Refrigerant R404A

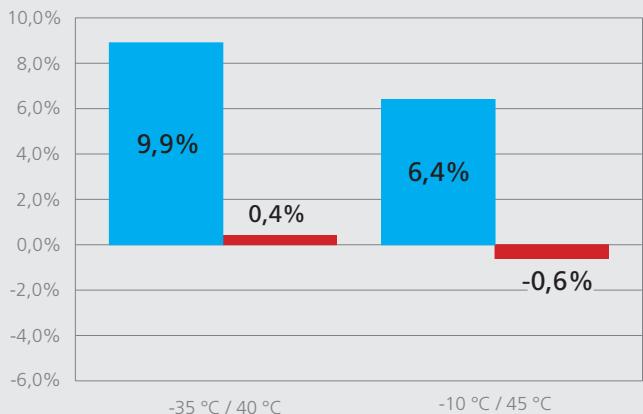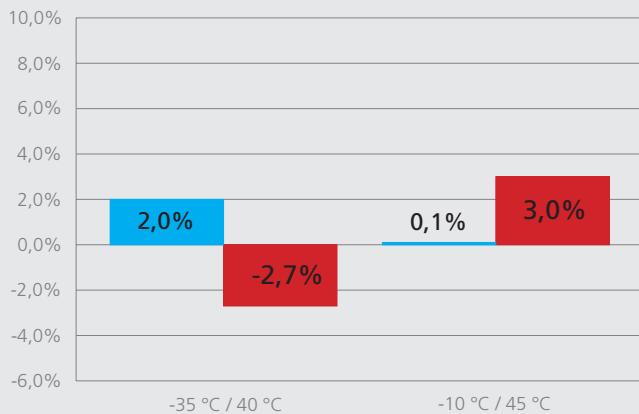

■ Cooling capacity ■ COP

## Comparison HG56e vs. HG5

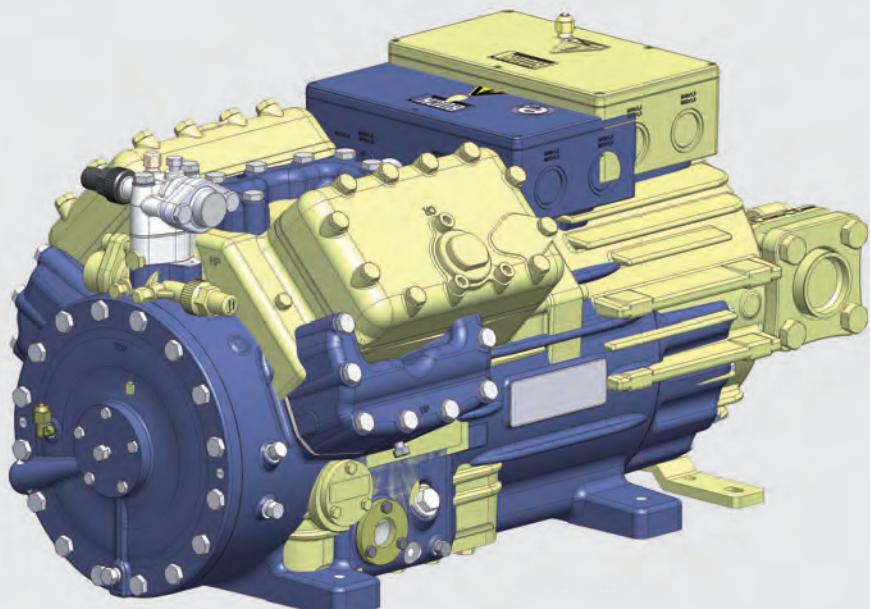

Blue: Bock HG56e  
Yellow: Bock HG5


New designed 6-cylinder housing for highest efficiency and smoothness



Length (cm)	Width (cm)	Height (cm)
-12,5	0	+3,5


Comparison HGX56e/850-4 vs. competitor

Refrigerant R134a


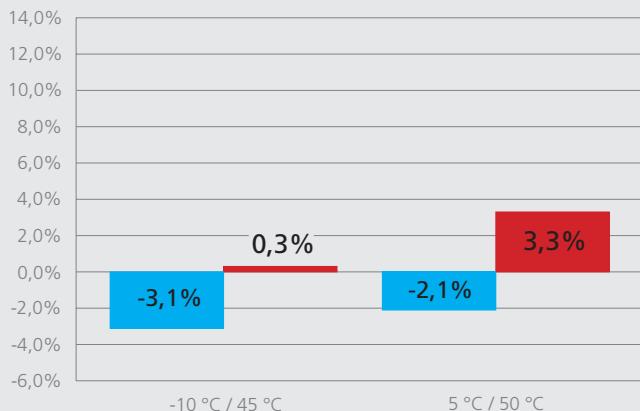


Comparison HGX56e/1150-4 S vs. competitor

Refrigerant R134a

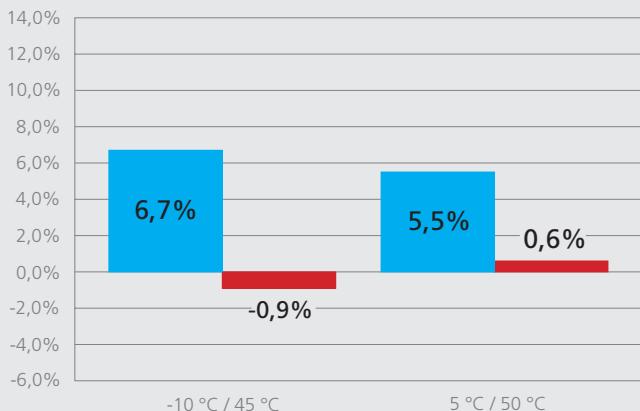

Refrigerant R404A

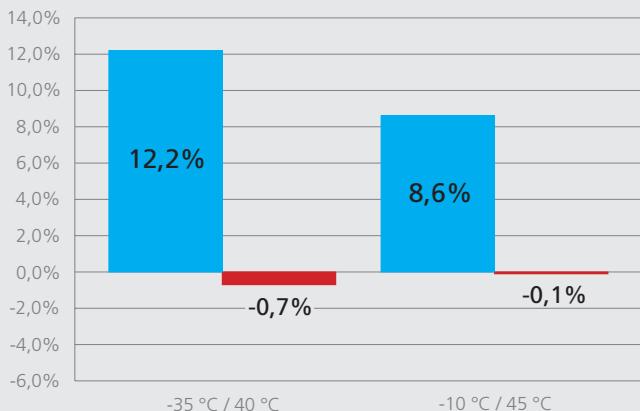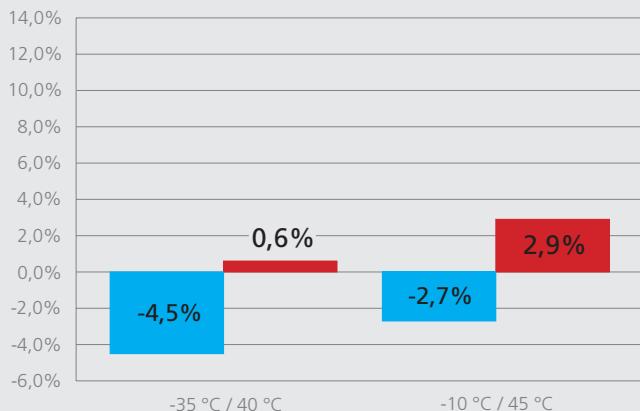

■ Cooling capacity ■ COP

## INT69 G Motor Protection

### Electronic Motor Protection GEA Bock INT69 G

**PTC sensors**  
Connection of up to nine PTC sensors possible




Temperature safety drive for the drive motor

The INT69 G is replacing, in the HG44e/HG56e and in all future new developments, the MP10 compressors used as standard at GEA Bock

The INT69 G also provides the usual functions, as:

- motor temperature monitoring
- hot gas temperature monitoring
- a reconnection preventing device
- a reset

### INT69 G Diagnose

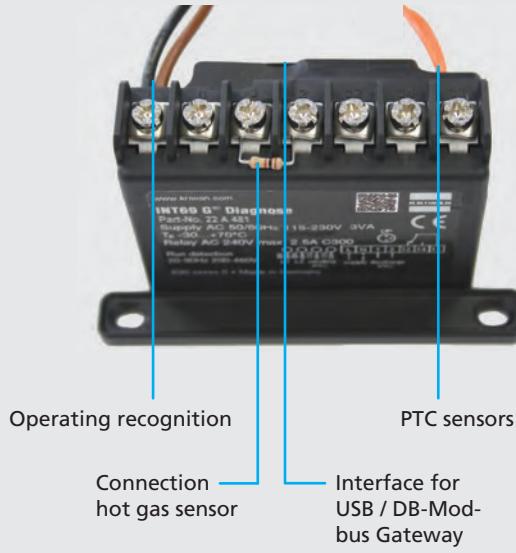

### Technical data

Unit designation	INT69 G	ING69 G Diagnose
Connection voltage	AC 115-230 V - 1 - 50/60 Hz ± 10% 3 VA	AC 115-230 V - 1 - 50/60 Hz ± 10% 3 VA
Relay	AC 240 V, 2,5A, C300	AC 240 V, 2,5A, C300
Dimensions L/W/H	53 x 33 x 68 mm	50 x 33 x 68 mm

## INT69 G Diagnose Unit Motor Protection

### Read facility via INTelligence diagnosis software

With the INTelligence software, valuable information can be obtained on the status of the compressor and the system. The diagnosis function includes the plausibility checks of the logic sequences, all important operation and error values of the compressor and provides for its clear visualization.

Crucial evaluation parameters can be configured individually. This allows for a quick analysis and an efficient system management.


Advantages:

- Simple operation
- Immediate diagnosis and precise problem solving
- Specially adaptable to the user's needs

If required, data can be retrieved directly at each compressor via USB port. A Modbus interface is available for integration in a network.

The data are sent periodically via the DP-Modbus gateway and the Modbus-LAN gateway to a server and can be retrieved remotely by the INTelligence diagnosis software.


The INTelligence diagnosis software can be downloaded for free at [www.kriwan.com](http://www.kriwan.com).

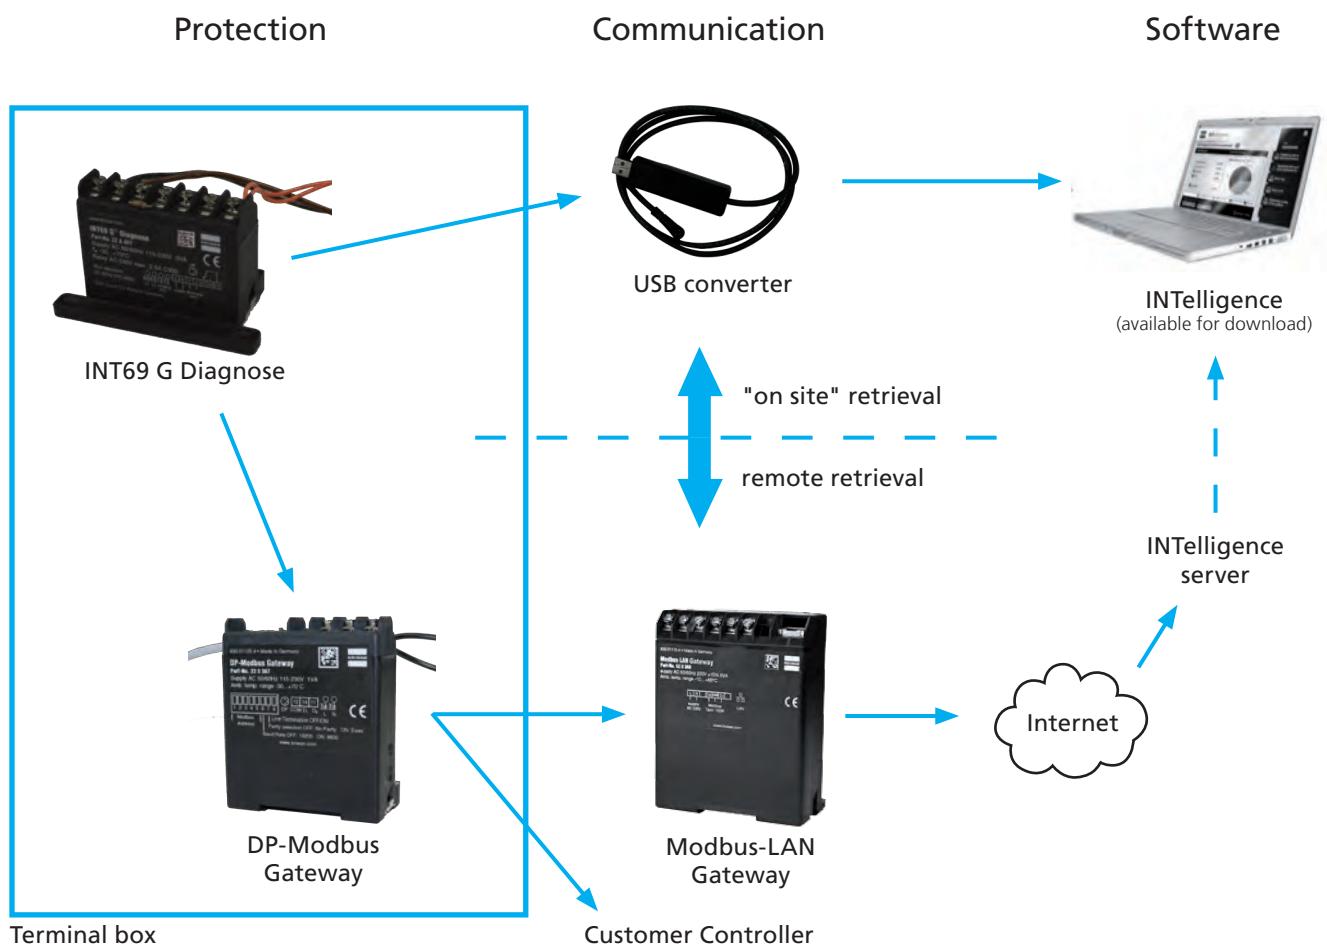

Further explanation can be found at [www.kriwan.com](http://www.kriwan.com).

In the event of inquiries please contact our Department for Application Technology, phone +49 7022 9454-0.

## R134a Operating limits

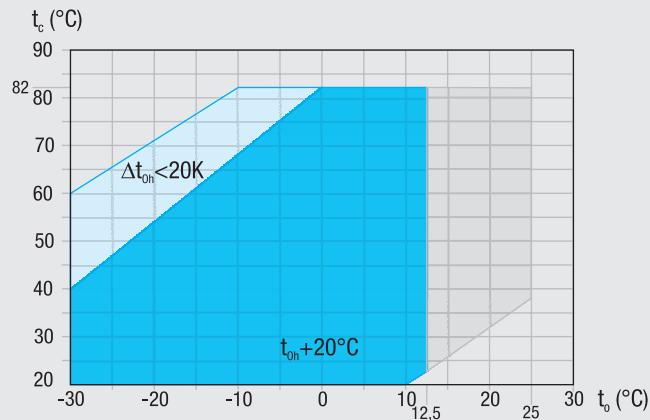

Unlimited application range

Supplementary cooling or reduced suction gas temperature

Motor version -S- (more powerful motor)

$t_o$  Evaporation temperature (°C)

$t_c$  Condensing temperature (°C)

$\Delta t_{oh}$  Suction gas superheat (K)

$t_{oh}$  Suction gas temperature (°C)

Max. permissible operating pressure (LP/HP)<sup>1)</sup>: 19/28 bar

<sup>1)</sup> LP = low pressure HP = high pressure

## R134a Notes

## Operating limits

Compressor operation is possible within the limits shown on the application diagrams. Please note the coloured areas. Compressor application limits should not be chosen for design purposes or continuous operation.

Restrictions to the operating limits may occur when using the Bock EFC (Electronic Frequency Control).

Further explanation see [www.bock.de](http://www.bock.de).

## Performance data

The performance data for R134a are based on European Standard EN 12900 50 Hz power supply frequency.

This signifies: 20 °C suction gas temperature without liquid subcooling.

This results in significant differences compared to specifications with liquid undercooling and/or suction-gas temperatures

Conversion factor for 60 Hz = 1,2

Performance data for other operating points, see GEA Bock software.

## Semi-hermetic GEA Bock 4- and 6-Cylinder Compressors

# Performance data

R134a		Performance data											50 Hz		
Type	Cond. temp. °C	Cooling capacity		$\dot{Q}_o$ [W]	Power consumption										
		Evaporating temperature °C											$P_e$ [kW]		
		12,5	10	7,5	5	0	-5	-10	-15	-20	-25	-30			
HGX44e/475-4	30	Q P 4,71	39200 35700 4,75	32500 28600 4,76	29500 25900 4,74	24100 21100 4,62	19400 16900 4,41	15400 13400 4,13	12100 10400 3,79	9190 7790 3,42	6850 5670 3,03	4920 3890 2,63			
	40	Q P 5,95	34500 31400 5,90	28600 25900 5,82	25900 21100 5,71	21100 16900 5,43	16900 13400 5,07	13400 10400 4,65	10400 7790 4,19	7790 5670 3,70	5670 3890 3,20	3890 2,72			
	50	Q P 7,12	29900 27200 6,97	24700 22300 6,61	22300 18100 6,16	18100 14400 5,64	14400 11300 5,08	11300 8660 4,49	8660 6430 3,88	6430 4520 3,27	4520 2880 2,69				
	60	Q P 8,16	25400 23000 7,91	20800 18800 7,65	18800 15100 7,36	15100 12000 6,74	12000 9280 6,06	9280 7000 5,35	7000 5040 4,62	5040 3340 3,89	3340 1840 3,17	1840 2,49			
	70	Q P 8,99	20800 18800 8,65	16900 15200 8,28	15200 12100 7,90	12100 9450 7,10	9450 7210 6,26	7210 5280 5,40	5280 3600 4,52	3600 2880 3,66	2880 1840 3,27				
	30	Q P 5,58	46600 42600 5,62	38700 35200 5,64	35200 28800 5,61	28800 23200 5,47	23200 18500 5,22	18500 14500 4,88	14500 11100 4,48	11100 8310 4,03	8310 6010 3,56	6010 3,09			
	40	Q P 7,07	41100 37500 7,01	34100 30900 6,91	30900 25200 6,79	25200 20300 6,45	20300 16100 6,01	16100 12500 5,51	12500 9480 4,95	9480 6950 4,37	6950 4820 3,78	4820 3,19			
HGX44e/565-4	50	Q P 8,49	35700 32500 8,31	29500 26700 8,10	26700 21700 7,87	21700 17400 7,33	17400 13700 6,71	13700 10600 6,03	10600 7890 5,31	7890 5610 4,58	5610 3640 3,86	3640 3,17			
	60	Q P 9,75	30400 27600 9,45	25000 22600 9,13	22600 18200 8,78	18200 14500 8,03	14500 11400 7,21	11400 8620 6,35	8620 6280 5,47	6280 4240 4,59	4240 2410 3,74	2410 2,92			
	70	Q P 10,70	25000 22600 10,30	20400 18400 9,90	18400 14700 9,44	14700 11600 8,47	11600 8910 7,45	8910 6610 6,41	6610 4590 5,36	4590 3640 4,32	3640 2410 3,17				
	30	Q P 6,52	55200 50400 6,58	45800 41600 6,59	41600 33900 6,56	33900 27300 6,40	27300 21700 6,11	21700 16900 5,72	16900 12900 5,25	12900 9590 4,74	9590 6870 4,19	6870 3,64			
	40	Q P 8,24	48600 44200 8,17	40200 36400 8,06	36400 29600 7,91	29600 23700 7,52	23700 18700 7,03	18700 14500 6,44	14500 10900 5,80	10900 7910 5,13	7910 5400 4,44	5400 3,76			
HGX44e/665-4	50	Q P 9,87	42100 38200 9,66	34700 31300 9,43	31300 25400 9,16	25400 20200 8,54	20200 15900 7,82	15900 12100 7,04	12100 8950 6,22	8950 6260 5,37	6260 3960 4,53	3960 3,73			
	60	Q P 11,30	35600 32300 10,90	29200 26300 10,60	26300 21100 10,20	21100 16700 9,34	16700 13000 8,40	13000 9720 7,42	9720 6970 6,40	6970 4580 5,39	4580 2470 4,39	2470 3,44			
	70	Q P 12,40	29100 26300 11,90	23700 21200 11,40	21200 16900 10,90	16900 13200 9,85	13200 9990 8,68	9990 7280 7,48	7280 4920 6,27	4920 3640 5,07	3640 2410 3,73				
	30	Q P 7,62	63600 58000 7,68	52800 47900 7,70	47900 39100 7,67	39100 31600 7,48	31600 25100 7,14	25100 19700 6,69	19700 15100 6,14	15100 11300 5,54	11300 8100 4,90	8100 4,25			
	40	Q P 9,63	56000 51100 9,54	46400 42100 9,42	42100 34200 9,24	34200 27500 8,79	27500 21800 8,21	21800 16900 7,53	16900 12800 6,78	12800 9360 5,99	9360 6460 5,19	6460 4,40			
HGX44e/770-4 S	50	Q P 11,50	48700 44200 11,20	40100 36300 11,00	36300 29500 10,70	29500 23600 9,97	23600 18600 9,14	18600 14300 8,23	14300 10700 7,26	10700 7510 6,28	7510 4830 5,30	4830 3,45			
	60	Q P 13,20	41300 37500 12,80	34900 30600 12,30	30600 24700 11,90	24700 19600 10,90	19600 15300 9,82	15300 11600 8,66	11600 8390 7,48	8390 5630 6,29	5630 3160 5,13	3160 2,02			
	70	Q P 14,50	34000 30700 13,90	27700 24900 13,40	24900 19900 12,70	19900 15600 11,50	15600 12000 10,10	12000 8810 8,74	8810 6070 7,32	6070 5,93	5,93	4,02			

Relating to 20 °C suction gas temperature without liquid subcooling.

This performance data is preliminary data!


Supplementary cooling or reduced suction gas temp.

R134a		Performance data				50 Hz	
Type	Displacement m <sup>3</sup> /h (50 Hz)	Cooling capacity $\dot{Q}_o$ [W]			Drive power $P_e$ [kW]		
		Normal cooling			Air-conditioning		
		Evaporation temp. -10°C / Cond. temp. +45°C		Evaporation temp. +5°C / Cond. temp. +50°C			
		$\dot{Q}_o$	$P_e$	COP	$\dot{Q}_o$	$P_e$	COP
HGX56e/850-4	73,8	22300	8,68	2,57	40100	11,7	3,43
HGX56e/995-4	86,6	26000	10,0	2,60	46800	13,6	3,44
HGX56e/1155-4	100,4	30200	11,7	2,58	54400	15,9	3,42

Relating to 20 °C suction gas temperature without liquid subcooling.

This performance data is preliminary data!

## R404A/R507 Operating limits

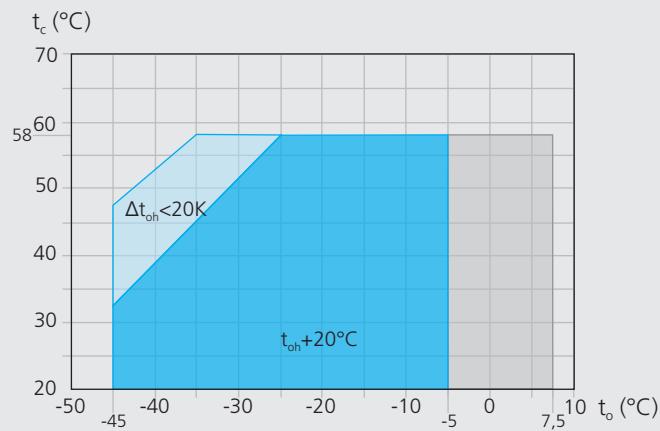

  Unlimited application range

  Supplementary cooling or reduced suction gas temperature

  Motor version -S- (more powerful motor)

$t_o$  Evaporation temperature (°C)

$t_c$  Condensing temperature (°C)

$\Delta t_{oh}$  Suction gas superheat (K)

$t_{oh}$  Suction gas temperature (°C)

Max. permissible operating pressure (LP/HP)<sup>1)</sup>: 19/28 bar

<sup>1)</sup> LP = low pressure HP = high pressure

## R404A/R507 Notes

## Operating limits

Compressor operation is possible within the limits shown on the application diagrams. Please note the coloured areas. Compressor application limits should not be chosen for design purposes or continuous operation.

Restrictions to the operating limits may occur when using the Bock EFC (Electronic Frequency Control).

Further explanation see [www.bock.de](http://www.bock.de).

## Performance data

The performance data for R404A/R507 are based on European Standard EN 12900 50 Hz power supply frequency.

This signifies: 20 °C suction gas temperature without liquid subcooling.

This leads to significant differences compared to systems with liquid subcooling and/or other suction gas temperatures

Performance data were compiled for R404A and R507.

The base values are the data for R404A.

Conversion factor for 60 Hz = 1,2

Performance data for other operating points, see GEA Bock software.

# Semi-hermetic GEA Bock 4- and 6-Cylinder Compressors

## Performance data

R404A/R507			Performance data											50 Hz	
Type	Cond. temp. °C		Cooling capacity $\dot{Q}_o$ [W]											Power consumption $P_e$ [kW]	
			Evaporating temperature °C												
			7,5	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45	
HGX44e/475-4	30	Q	52500 7,73	48300 7,85	40500 7,94	33500 7,80	27500 7,52	22400 7,10	18000 6,57	14300 5,94	11100 5,26	8340 4,54	6060 3,81	4110 3,11	
		P	45200 9,97	41400 9,90	34600 9,61	28300 9,16	23200 8,57	18800 7,88	15000 7,12	11800 6,31	9010 5,47	6670 4,64	4650 3,84	2870 3,11	
			37600 11,80	34300 11,50	28500 10,90	23100 10,20	18800 9,41	15100 8,49	12000 7,55	9260 6,59	6970 5,65	5000 4,76	3270 3,94		
HGX44e/565-4	30	Q	62700 9,18	57700 9,32	48400 9,43	39800 9,31	32800 8,97	26800 8,47	21600 7,82	17200 7,07	13400 6,24	10200 5,38	7470 4,51	5140 3,66	
		P	54000 11,80	49600 11,70	41400 11,40	33700 10,90	27700 10,20	22500 9,42	18100 8,49	14300 7,51	11100 6,50	8230 5,50	5820 4,55	3680 3,67	
			45100 14,00	41200 13,70	34200 13,00	27500 12,30	22500 11,20	18200 10,10	14500 9,01	11400 7,85	8620 6,72	6270 5,64	4180 4,66		
HGX44e/665-4	30	Q	73100 10,70	67100 10,90	56300 11,00	46500 10,90	38300 10,50	31100 9,94	25000 8,32	19800 7,36	15300 6,35	11600 5,33	8340 4,34	5630 4,34	
		P	62700 13,90	57400 13,80	47900 13,30	39300 12,80	32200 12,00	26000 11,00	20800 9,97	16300 8,83	12500 7,66	9160 6,49	6360 5,37	3910 4,34	
			52000 16,50	47500 16,10	39300 15,30	32000 14,30	26000 13,10	20900 11,80	16500 10,50	12800 9,22	9570 7,91	6840 6,66	4440 5,51		
HGX44e/770-4 S	30	Q	84600 12,40	77800 12,60	65300 12,80	54300 12,60	44700 12,10	36500 11,50	29400 10,60	23300 9,62	18100 8,51	13800 7,34	10100 6,16	6840 5,02	
		P	72600 16,10	66500 16,00	55600 15,50	46100 14,80	37800 13,80	30700 12,70	24500 11,50	19300 10,20	14900 8,86	11100 7,51	7750 6,22	4860 5,02	
			60300 19,20	55100 18,80	45700 17,80	37600 16,50	30700 15,20	24700 13,70	19600 12,20	15300 10,60	11600 9,15	8360 7,70	5530 6,37		

Relating to 20 °C suction gas temperature without liquid subcooling.

This performance data is preliminary data!

 Motor version -S- (more powerful motor)


 Supplementary cooling or reduced suction gas temp.

R404A/R507			Performance data											50 Hz		
Type	Displacement		Cooling capacity $\dot{Q}_o$ [W]											Drive power $P_e$ [kW]		
			Deep freezing			Normal cooling			Air-conditioning							
			Evaporation temp. -35°C / Condensing temp. +40°C			Evaporation temp. -10°C / Condensing temp. +45°C			Evaporation temp. +5°C / Condensing temp. +50°C							
			$\dot{Q}_o$	$P_e$	COP	$\dot{Q}_o$	$P_e$	COP	$\dot{Q}_o$	$P_e$	COP	$\dot{Q}_o$	$P_e$	COP		
HGX56e/850-4	73,8		12400	8,26	1,50	37700	16,0	2,36								
HGX56e/850-4 S	73,8					38100	16,0	2,38	61200	20,6	2,97					
HGX56e/995-4	86,6		14300	9,69	1,48	44000	18,8	2,34								
HGX56e/995-4 S	86,6					44300	18,7	2,37	71300	24,2	2,95					
HGX56e/1155-4	100,4		16600	11,1	1,50	51200	21,8	2,35								
HGX56e/1155-4 S	100,4					51700	21,8	2,37	83400	27,9	2,99					

Relating to 20 °C suction gas temperature without liquid subcooling.

This performance data is preliminary data!

## R407C Operating limits

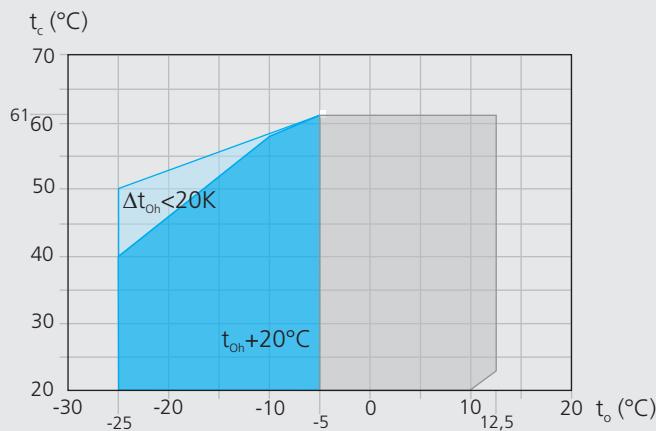

- Unlimited application range
  - Supplementary cooling or reduced suction gas temperature
  - Motor version -S- (more powerful motor)
- $t_o$  Evaporation temperature ( $^{\circ}\text{C}$ )  
 $t_c$  Condensing temperature ( $^{\circ}\text{C}$ )  
 $\Delta t_{\text{oh}}$  Suction gas superheat (K)  
 $t_{\text{oh}}$  Suction gas temperature ( $^{\circ}\text{C}$ )

<sup>1)</sup> LP = low pressure HP = high pressure

## R407C Notes

## Operating limits

Compressor operation is possible within the limits shown on the application diagrams. Please note the coloured areas. Compressor application limits should not be chosen for design purposes or continuous operation.

Restrictions to the operating limits may occur when using the Bock EFC (Electronic Frequency Control).

Further explanation see [www.bock.de](http://www.bock.de).

## Performance data

The performance data for R407C are based on European Standard EN 12900 50 Hz power supply frequency.

This signifies: 20 °C suction gas temperature without liquid sub-cooling.

Evaporation and condensing temperatures are based on the dew point values (saturated vapour conditions).

Conversion factor for 60 Hz = 1,2

Performance data for other operating points, see GEA Bock software.

R407C			Performance data										50 Hz	
Type	Cond. temp. °C	Cooling capacity $\dot{Q}_o$ [W]	Power consumption $P_e$ [kW]											
			Evaporating temperature °C											
			12,5	10	7,5	5	0	-5	-10	-15	-20	-25		
HG44e/475-4	30	Q P 7,20	56600 51700 7,25	47100 41700 7,25	42800 37800 7,21	35200 30900 7,03	28500 24900 6,66	22900 19900 6,24	18100 15600 5,73	14100 12000 5,18	10700 8850 4,59	10700 8850 4,59		
	40	Q P 9,13	50200 45800 9,03	41700 37800 8,89	37800 30900 8,72	30900 24900 8,28	24900 19900 7,69	19900 15600 7,05	15600 12000 6,35	12000 8850 5,61	8850 8850 4,87	8850 8850 4,87		
	50	Q P 10,80	43600 39700 10,50	36000 32600 10,30	32600 26500 10,00	26500 21200 9,33	21200 16800 8,54	16800 13100 7,69	13100 9850 6,80	9850 7100 5,90	7100 5,90 5,02	7100 5,90 5,02		
HG44e/565-4	30	Q P 8,54	67400 61600 8,60	56200 51100 8,61	51100 42000 8,56	42000 33900 8,34	33900 27300 7,93	27300 21700 7,42	21700 17000 6,81	17000 12900 6,14	12900 12900 5,44	12900 12900 5,44		
	40	Q P 10,80	60000 54700 10,70	49800 45200 10,50	45200 37000 10,30	37000 29700 9,83	29700 23800 9,18	23800 18700 8,40	18700 14500 7,55	14500 10800 6,67	10800 10800 5,78	10800 10800 5,78		
	50	Q P 12,80	52200 47500 12,50	43100 39000 12,20	39000 31800 11,80	31800 25300 11,00	25300 20100 10,20	20100 15700 9,18	15700 12000 8,10	12000 8650 7,01	8650 8650 5,95	8650 8650 5,95		
HG44e/665-4	30	Q P 10,00	78700 71900 10,00	65500 59600 10,00	59600 48900 10,00	48900 40000 9,76	40000 32200 9,23	32200 25500 8,65	25500 19800 7,95	19800 15000 7,17	15000 15000 6,36	15000 15000 6,36		
	40	Q P 12,70	69800 63600 12,50	57900 52500 12,30	52500 42900 12,10	42900 34900 11,50	34900 27900 10,60	27900 21900 9,77	21900 16800 8,80	16800 12400 7,78	12400 12400 6,75	12400 12400 6,75		
	50	Q P 15,10	60600 55100 14,70	49900 45200 14,40	45200 36700 13,90	36700 29700 13,00	29700 23500 11,80	23500 18300 10,60	18300 13800 9,43	13800 9890 8,18	9890 9890 6,96	9890 9890 6,96		
HG44e/770-4 S	30	Q P 11,60	92000 84000 11,70	76600 69600 11,70	69600 57100 11,60	57100 46300 11,30	46300 37100 10,80	37100 29300 10,00	29300 22700 9,22	22700 17000 8,26	17000 17000 7,23	17000 17000 7,23		
	40	Q P 14,80	81400 74200 14,70	67400 61200 14,40	61200 49900 14,10	49900 40300 13,30	40300 32000 12,40	32000 25000 11,30	25000 19000 10,00	19000 13900 8,82	13900 13900 7,51	13900 13900 7,51		
	50	Q P 17,60	70400 64000 17,20	58000 52400 16,70	52400 42500 16,20	42500 34000 15,00	34000 26800 13,60	26800 20600 12,10	20600 15400 10,60	15400 10800 9,06	10800 10800 7,49	10800 10800 7,49		


Relating to 20 °C suction gas temperature  
without liquid subcooling.

 Motor version -S-  
(more powerful motor)

 Supplementary cooling or  
reduced suction gas temp.

This performance data is preliminary data!

## R22 Operating limits

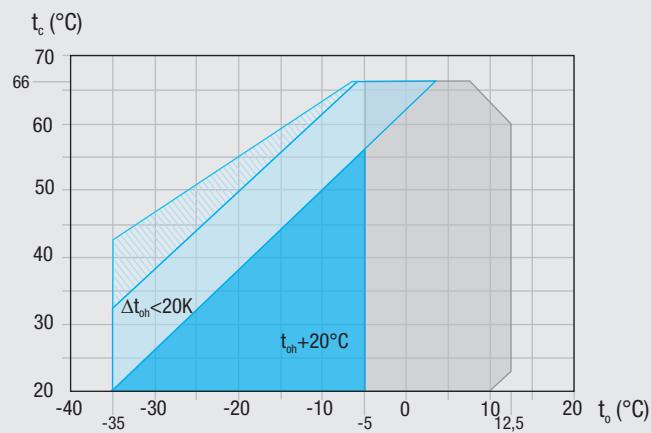

- Unlimited application range
  - Supplementary cooling or reduced suction gas temperature
  - Supplementary cooling and reduced suction gas temperature
  - Motor version -S- (more powerful motor)
- $t_o$  Evaporation temperature ( $^{\circ}\text{C}$ )  
 $t_c$  Condensing temperature ( $^{\circ}\text{C}$ )  
 $\Delta t_{\text{oh}}$  Suction gas superheat (K)  
 $t_{\text{oh}}$  Suction gas temperature ( $^{\circ}\text{C}$ )

Max. permissible operating pressure (LP/HP)<sup>1)</sup>: 19/28 bar

<sup>1)</sup> LP = low pressure HP = high pressure

## R22 Notes

## Operating limits

Compressor operation is possible within the limits shown on the application diagrams. Please note the coloured areas. Compressor application limits should not be chosen for design purposes or continuous operation.

Restrictions to the operating limits may occur when using the Bock EFC (Electronic Frequency Control).

Further explanation see [www.bock.de](http://www.bock.de).

## Performance data

The performance data for R22 are based on European Standard EN 12900 50 Hz power supply frequency.

This signifies: 20 °C suction gas temperature without liquid sub-cooling.

Conversion factor for 60 Hz = 1,2

Performance data for other operating points, see GEA Bock software.

R22			Performance data											50 Hz	
Type	Cond. temp. °C	Cooling capacity $\dot{Q}_o$ [W]	Evaporating temperature °C											Power consumption $P_e$ [kW]	
			12,5	10	7,5	5	0	-5	-10	-15	-20	-25	-30	-35	
HG44e/475-4	30	Q P 7,16 7,27 58200 53600 49100 45000 37500 30800 25100 20300 16100 12500 9390 6730 4,55 3,93													
	40	Q P 9,17 9,15 52700 48300 44300 40500 33600 27400 22200 17800 14000 10700 7780 5280 4,78 4,02													
	50	Q P 11,00 10,80 47000 43100 39300 35900 29600 24000 19300 15300 11800 8800 5,82													
HG44e/565-4	30	Q P 8,50 8,64 69400 63900 58600 53700 44800 36700 30000 24300 19300 15100 11400 8180 6,12 5,39 4,64													
	40	Q P 10,80 10,80 62900 57700 52900 48400 40200 32600 26600 21300 16800 12900 9460 6450 6,58 5,66 4,74													
	50	Q P 13,10 12,90 56300 51500 47100 43000 35500 28600 23200 18400 14300 10800 6,91													
HG44e/665-4	30	Q P 9,95 10,10 81000 74500 68300 62600 52100 43300 35300 28500 22600 17500 13200 9,44 6,30 5,44													
	40	Q P 12,70 12,70 73100 67100 61500 56200 46600 38400 31200 24900 19600 14900 10900 7320 7,68 6,63 5,57													
	50	Q P 15,40 15,20 65200 59700 54600 49700 41000 33600 27000 21400 16500 12300 8,07													
HG44e/770-4 S	30	Q P 11,50 11,70 93900 86300 79200 72600 60500 50000 40900 33000 26200 20400 15400 11100													
	40	Q P 14,80 14,80 84700 77800 71300 65200 54100 44500 36200 29000 22800 17500 12800 8,74 7,74 6,51													
	50	Q P 17,90 17,70 75600 69300 63300 57800 47700 39000 31500 25000 19400 14500 9,43													

Relating to 20 °C suction gas temperature  
without liquid subcooling

This performance data is preliminary data!

 Supplementary cooling or reduced suction gas temp.

 Motor version -S-  
(more powerful motor)

 Supplementary cooling and  
reduced suction gas temp.

Type	Number of cylinders	Displacement 50 / 60 Hz (1450/1740 rpm)	Electrical data				Weight	Connections ④		Oil charge
			Voltage	Max. working current ①	Max. power consump- tion ②	Starting current (rotor locked)		Discharge line DV	Suction line SV	
			m³/h	A	kW	A	kg	mm l inch	mm l inch	Ltr.
				PW 1 + 2		PW 1 / PW 1 + 2				
HG44e/475-4	4	41,30 / 49,60	③	19	11,0	83 / 109	164	28 / 1 <sup>1</sup> / <sub>8</sub>	35 / 1 <sup>3</sup> / <sub>8</sub>	2,3
HG44e/475-4 S	4	41,30 / 49,60	③	23	13,1	115 / 150	168	28 / 1 <sup>1</sup> / <sub>8</sub>	35 / 1 <sup>3</sup> / <sub>8</sub>	2,3
HG44e/565-4	4	49,20 / 59,00	③	22	13,2	83 / 109	164	28 / 1 <sup>1</sup> / <sub>8</sub>	35 / 1 <sup>3</sup> / <sub>8</sub>	2,3
HG44e/565-4 S	4	49,20 / 59,00	③	26	15,6	133 / 171	170	28 / 1 <sup>1</sup> / <sub>8</sub>	42 / 1 <sup>5</sup> / <sub>8</sub>	2,3
HG44e/665-4	4	57,70 / 69,20	③	26	15,4	115 / 150	169	28 / 1 <sup>1</sup> / <sub>8</sub>	42 / 1 <sup>5</sup> / <sub>8</sub>	2,3
HG44e/665-4 S	4	57,70 / 69,20	③	30	18,3	133 / 171	168	28 / 1 <sup>1</sup> / <sub>8</sub>	42 / 1 <sup>5</sup> / <sub>8</sub>	2,3
HG44e/770-4 S	4	67,00 / 80,40	③	35	21,4	133 / 171	164	28 / 1 <sup>1</sup> / <sub>8</sub>	42 / 1 <sup>5</sup> / <sub>8</sub>	2,3
HG56e/850-4	6	73,80 / 88,60	③	38	22,6	133 / 171	194	28 / 1 <sup>1</sup> / <sub>8</sub>	42 / 1 <sup>5</sup> / <sub>8</sub>	3,0
HG56e/850-4 S	6	73,80 / 88,60	③	43	25,3	162 / 210	211	28 / 1 <sup>1</sup> / <sub>8</sub>	54 / 2 <sup>1</sup> / <sub>8</sub>	3,0
HG56e/995-4	6	86,60 / 103,90	③	44	26,0	162 / 210	208	28 / 1 <sup>1</sup> / <sub>8</sub>	54 / 2 <sup>1</sup> / <sub>8</sub>	3,0
HG56e/995-4 S	6	86,60 / 103,90	③	50	29,9	189 / 246	211	28 / 1 <sup>1</sup> / <sub>8</sub>	54 / 2 <sup>1</sup> / <sub>8</sub>	3,0
HG56e/1155-4	6	100,40 / 120,50	③	51	30,4	189 / 246	212	28 / 1 <sup>1</sup> / <sub>8</sub>	54 / 2 <sup>1</sup> / <sub>8</sub>	3,0
HG56e/1155-4 S	6	100,40 / 120,50	③	61	34,5	253 / 330	221	28 / 1 <sup>1</sup> / <sub>8</sub>	54 / 2 <sup>1</sup> / <sub>8</sub>	3,0

\* PW = Part Winding, motors for part winding start    1 = 1. part winding    2 = 2. part winding

### Explanations:

① Tolerance ( $\pm 10\%$ ) relates to the mean value of the voltage range.  
Other voltages and current types on request.


② - The specifications for max. power consumption apply for 50Hz operation. For 60Hz operation, the specifications have to be multiplied by the factor 1.2. The max. working current remains unchanged

- Take account of the max. operating current / max. power consumption when designing contactors, leads and fuses.  
Switches: Service category AC3


③ 380-420 V Y/ YY - 3 - 50 Hz PW  
440-480 V Y/ YY - 3 - 60 Hz PW  
PW = Part Winding, motors for part winding start  
(no start unloaders required)  
- Winding ratios: 70% / 30%  
- Designs for Y/Δ on request

④ For soldering connections

HG44e

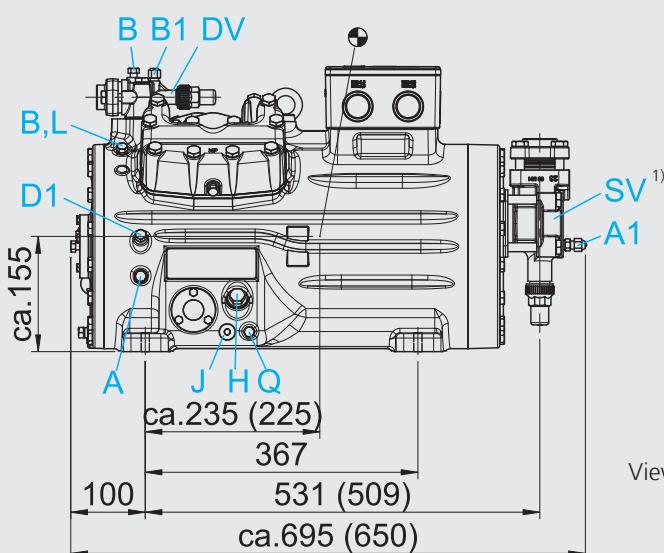


Dimensions in ( ) for HG(X)44e/475-4 (S) + 565-4

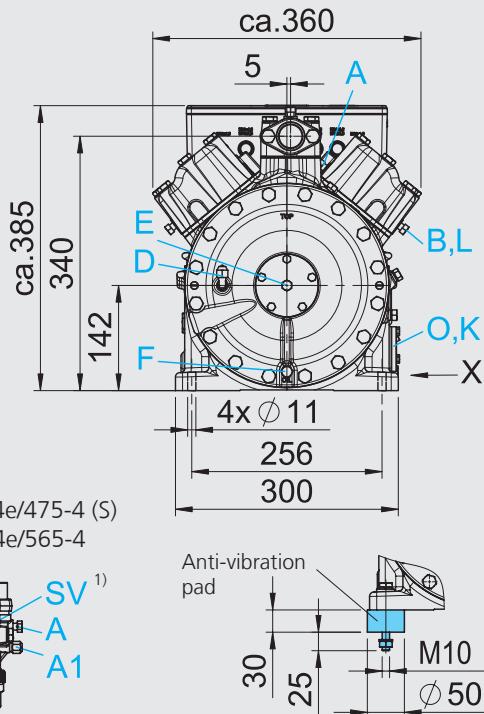


View HG(X)44e/475-4 (S)  
HG(X)44e/565-4

HG56e

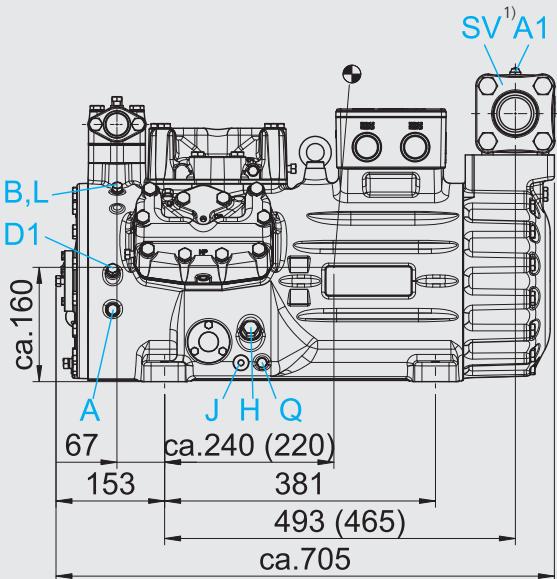

Dimensions in ( ) for HG(X)56e/850-4

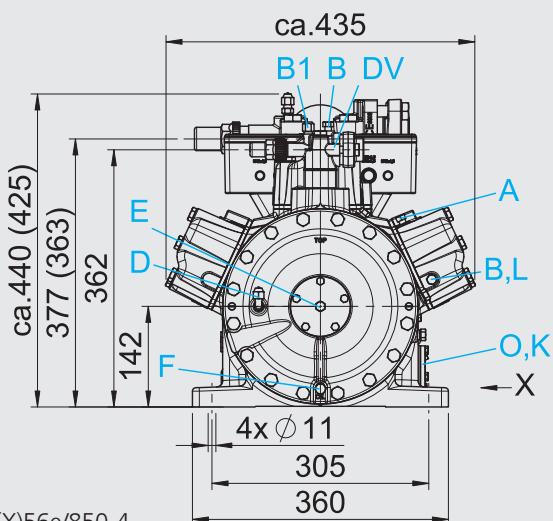

View HG(X)56e/850-4

Dimensions in mm


<sup>1)</sup> SV 90° rotatable

● Centre of gravity

## View X

## Possibility to connect to oil level regulator

- Three-hole connection for oil level regulator make ESK, AC+R, CARLY (3x M6, 10 deep)
- Three-hole connection for oil level regulator make TRAXOIL (3 x M6 x 10 deep)

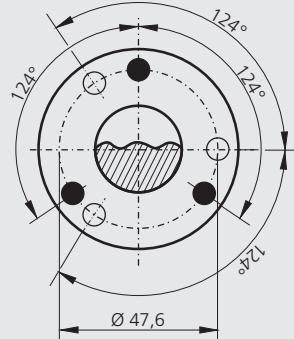

Dimensions in mm






## Connections



SV	Suction line	please refer to Technical data page 18
DV	Discharge line	
A	Connection suction side, not lockable	1/4 " NPTF
A1	Connection suction side, lockable	7/16 " UNF
B	Connection discharge side, not lockable	1/8 " NPTF
B1	Connection discharge side, lockable	7/16 " UNF
D	Connection oil pressure safety switch LP	7/16 " UNF
D1	Connection oil return from oil separator	1/4 " NPTF
E	Connection oil pressure gauge	1/8 " NPTF
F	Oil drain	1/4 " NPTF
H	Oil charge plug	M 22 x 1,5
J	Connection oil sump heater	Ø 15 mm
K	Sight glass	-
L	Connection thermal protection thermostat	1/8 " NPTF
O	Connection oil level regulator	3 x M6
Q	Connection oil temperature sensor	1/8 " NPTF

Scope of supply	HG44e	HG56e
Semi-hermetic four cylinder reciprocating compressor with drive motor for part winding start 380-420 V Y / YY - 3 - 50 Hz 440-480 V Y / YY - 3 - 60 Hz	●	
Single-section compressor housing with hermetically integrated electric motor		
Semi-hermetic six cylinder reciprocating compressor with drive motor for part winding start 380-420 V Y / YY - 3 - 50 Hz 440-480 V Y / YY - 3 - 60 Hz		●
Single-section compressor housing with hermetically integrated electric motor		
Winding protection with PTC resistor sensors and electronic trigger unit INT69 G	●	●
Oil pump	●	●
Possibility to connect to oil level controllers makes ESK, AC+R or CARLY	●	●
Possibility to connect to oil level controllers make Traxoil	● <sup>1)</sup>	● <sup>1)</sup>
Oil charge: HG: FUCHS Reniso SP46 HGX: FUCHS Reniso Triton SE55	●	●
Sight glass	●	●
Decompression valve	●	●
Suction and discharge line valve	●	●
Inert gas charge	●	●
4 anti-vibration pads enclosed	●	●

<sup>1)</sup> Only possible with additional adapter

Accessories	HG44e	HG56e
① Oil sump heater 220-240 V - 1 - 50/60 Hz, 160 W	●	●
② Thermal protection thermostat (PTC)	●	●
③ Capacity regulator 230 V - 1 - 50/60 Hz, IP65, 1 capacity regulator = 50% residual capacity	●	
Capacity regulator 230 V - 1 - 50/60 Hz, IP65, 1-2 capacity regulators = 66/33% residual capacity		●
④ Start unloader by means of a Bock ES (Electronic Soft Start) 400 V - 3 - 50/60 Hz, IP20, (connection clamps IP00) for installation in switch cabinet	● <sup>1)</sup>	● <sup>1)</sup>
⑤ Oil pressure safety switch MP 54 230 V - 1 - 50/60 Hz, IP20	● <sup>1)</sup>	● <sup>1)</sup>
⑥ Oil differential pressure sensor, ( $\Delta p$ -switch Kriwan make) 220-240 V - 1 - 50/60 Hz	● <sup>1)</sup>	● <sup>1)</sup>
⑦ INT69 G Diagnose 115 V / 230 V AC, 50/60 Hz, IP00 (INT69 G not applicable)	●	●
⑧ DP-Modbus Gateway 115 V / 230 V AC, 50/60 Hz, IP00 incl. adapter cable	● <sup>1)</sup>	● <sup>1)</sup>
⑨ Modbus-LAN Gateway 230 V AC, 50/60 Hz, IP00	● <sup>1)</sup>	● <sup>1)</sup>
⑩ USB converter for INT69 G Diagnose	● <sup>1)</sup>	● <sup>1)</sup>
⑪ Oil service valve	●	●
⑫ Additional fan 230 V D /400 V Y -3- 50 Hz, 120 W, 230-265 V $\Delta$ / 400-460 V Y - 3 - 60 Hz, 190 W, IP54	● <sup>1)</sup>	● <sup>1)</sup>
⑬ Cylinder cover prepared for capacity regulator	●	●
⑭ Rear bearing flange prepared for oil differential pressure sensor ( $\Delta p$ -switch Kriwan make)	●	●
⑮ Connection piece suction and discharge valve in welded construction	●	●
Special voltage and/or frequency	● <sup>2)</sup>	● <sup>2)</sup>
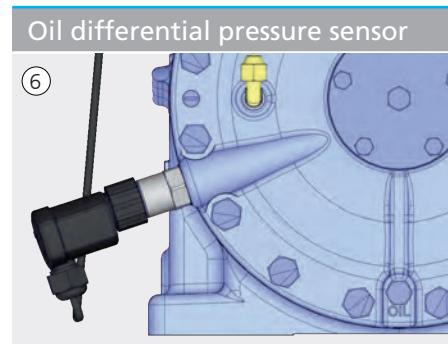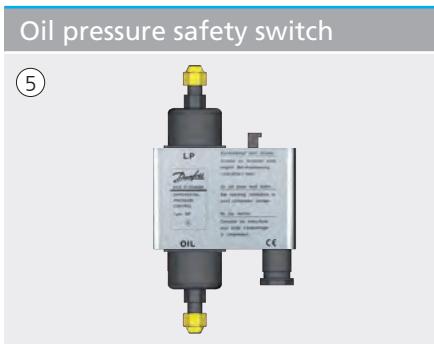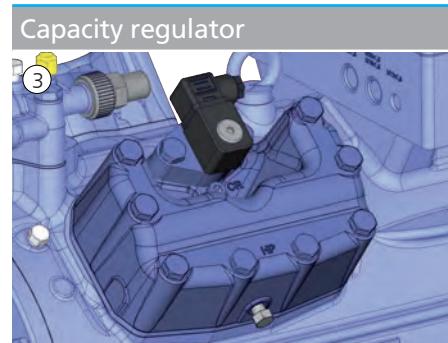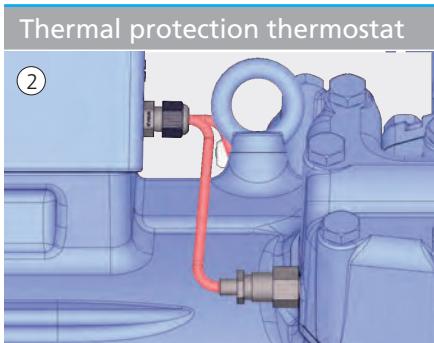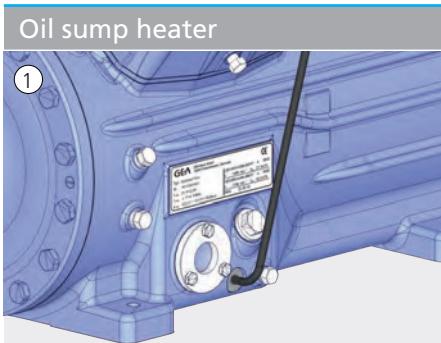
<sup>1)</sup> Enclosed package<sup>2)</sup> On request

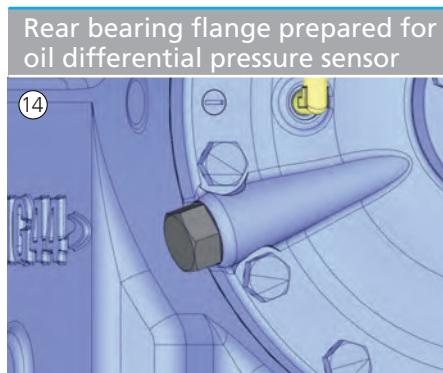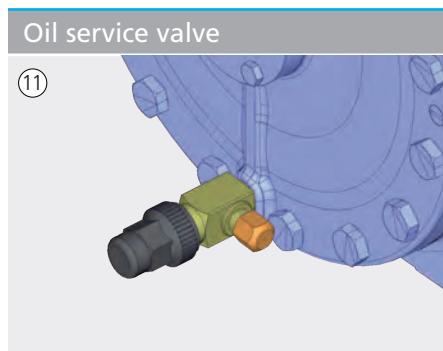



*We live our values.*

Excellence • Passion • Integrity • Responsibility • GEA-versity

GEA Group is a global engineering company with multi-billion euro sales and operations in more than 50 countries. Founded in 1881, the company is one of the largest providers of innovative equipment and process technology. GEA Group is listed in the STOXX® Europe 600 index.

## GEA Refrigeration Technologies

GEA Bock GmbH

Benzstraße 7, 72636 Frickenhausen, Germany  
Phone: +49 7022 9454-0, Fax: +49 7022 9454-137  
bock@gea.com, www.bock.de, www.gea.com

